


THERMOPAR

INDUSTRIAL RTD

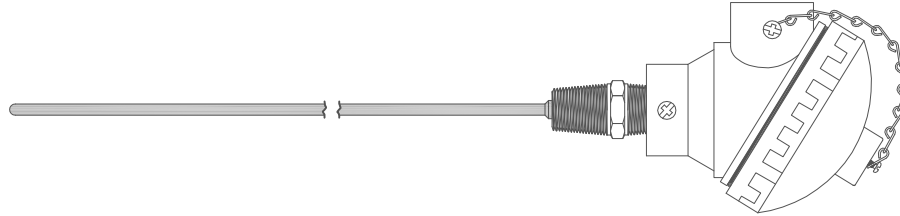

RTDI

1	2	3	4	5	6	7	8
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

RTD ELEMENT	
C	100 OHM
F	500 OHM
M	1000 OHM

DIAMETER	
2	2 WIRES
3	3 WIRES
4	4 WIRES

DIAMETER	
.125	1/8"
.188	3/16"
.250	1/4"
.375	3/8"

SHEATH LENGTH	
EX:	6 1/2"

TRANSMITTER	
T	Tx BLOCK
0	NO TRANSMITTER

TERMINATION	
KNE	STAN. ALUMNINUM
KSE	SMALL ALUMINUM
KNPL	STAN. ALUM. FLIP TOP
CSS	STAN. STAINLESS HEAD
CCI	STAN. CAST IRON HEAD
KPP	STAN.POLYPROP. HEAD
KNN	STAN. NYLON HEAD
XPA	EXPLOSION PROOF ALUM.
XDS	EXPLOSION PROOF 316 SS

FITTINGS	
75	3/4" NPT
50	1/2" NPT
25	1/4" NPT

OTHER	
X	SPECIFY
0	NONE