


THERMOPAR

MAGNETIC RTD

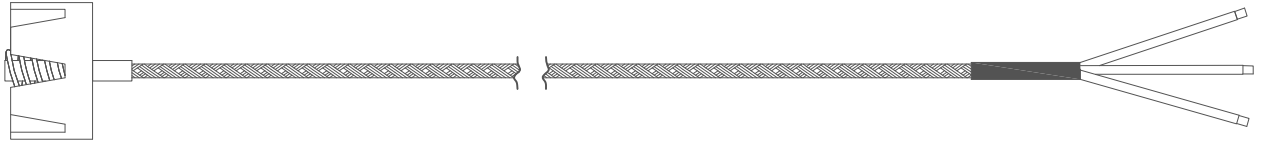

RTDM

1	2	3	4	5	6	7	8
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

RTD ELEMENT	
C	100 OHM
F	500 OHM
M	1000 OHM

WIRE TYPE	
F	FIBERGLASS
S	FIBERGLASS W/ SSOB
A	FIBERGLASS W/ ARMOR
T	TEFLON

NUMBER OF LEADS	
2	2 WIRES
3	3 WIRES
4	4 WIRES

TERMINATION	
A	SPLIT LEADS
B	SPLIT LEADS W/ SPADES
C	STANDARD MALE CONN.
D	MINI MALE CONN.
E	STANDARD FEMALE CONN.
F	MINI FEMALE CONN.

DIAMETER	
2	.125 (1/8")
3	.188 (3/16")
4	.250 (1/4")

OTHER	
X	SPECIFY
O	NONE

SHEATH LENGTH	
	EX: 6 1/2"

WIRE LENGTH	
	EX: 36"