


THERMOPAR

GENERAL PURPOSE INDUSTRIAL

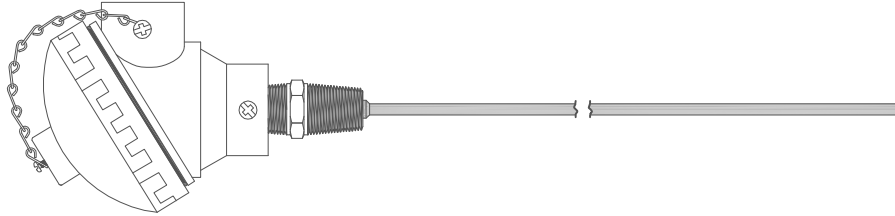

GPI

1	2	3	4	5	6	7	8	9
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

CALIBRATION	
J, JJ, K, KK, T, TT, E, EE	

1

DIAMETER	
.125	1/8"
.188	3/16"
.250	1/4"
.375	3/8"

2

JUNCTION	
G	GROUNDED
U	UNGROUND

3

SHEATH LENGTH	
EX: 6 1/2"	

4

TRANSMITTER	
T	Tx BLOCK
I	Tx ISOBLOCK
0	NO TRANSMITTER

5

6

TERMINATION	
KNE	STAN. ALUMINUM
KSE	SMALL ALUMINUM
KNPL	STAN. ALUM. FLIP TOP
CSS	STAN. STAINLESS HEAD
CCI	STAN. CAST IRON HEAD
KPP	STAN. POLYPROP. HEAD
KNN	STAN. NYLON HEAD
XPA	EXPLOSION PROOF ALUM.
XDS	EXPLOSION PROOF 316 SS

7

FITTINGS	
75	3/4" NPT
50	1/2" NPT
25	1/4" NPT

8

OTHER	
X	SPECIFY
0	NONE

9

SHEATH MATERIAL	
S	316 SS